

# Emergency Stop Switch A22E

## Install in 22-dia. or 25-dia. Panel Cutout


- Direct opening mechanism to open the circuit when the contact welds →.
- Safety lock mechanism prevents operating errors.
- Easy mounting and removal of Switch Blocks using a lever.
- Mount three Switch Units in series to improve wiring efficiency (with non-lighted Switch Units, three Units can be mounted for multiple contacts).
- Finger protection mechanism on Switch Unit provided as a standard feature.
- Install using either round, or forked crimp terminals.
- Oil-resistant to IP65 (non-lighted models)/IP65 (lighted models)

**Note:** Be sure to read the precautions for all pushbutton switches in the *Pushbutton Switches Group Catalog* (Cat. No. X018), as well as the "Safety Precautions" on page 19.



## Features

### Safety Lock Mechanism to Prevent Misuse

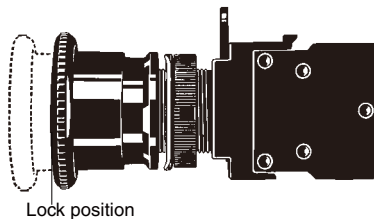


This Switch enables emergency stops only when the pushbutton is pressed intentionally and firmly.


Even if an object or person touches the pushbutton by mistake, the contact will not be released unless the pushbutton reaches the lock position.

**This Switch uses a finger protection mechanism to prevent electrical shocks. Moreover, it is provided with a mechanism to prevent terminal screws from coming off and also allows connection to either round or forked crimp terminals.**

Finger protection

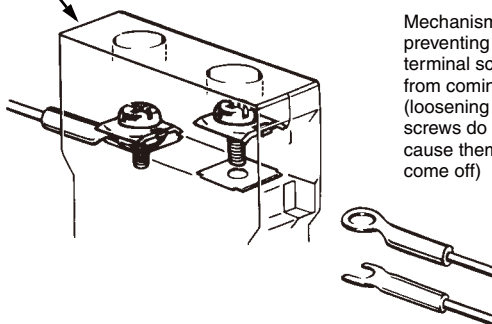

### Construction

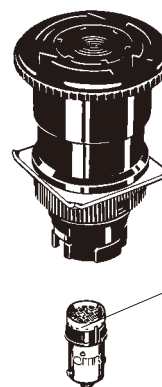

**Operation Unit**


**Color: Red**

Non-lighted  
Lighted

**Lamp**

**Light source**

- LED Lamp
- Incandescent Lamp



**Switch**

**Contact Ratings**

- 10 A at 110 VAC (resistive load)
- 10 A at 24 VDC (resistive load)

**Lighting Method**

- Non-lighted
- Lighted (without Voltage Reduction Unit)
- Lighted (with Voltage Reduction Unit)


(The above figures are examples of the lighted model.)

# Model Number Structure

## Model Number Legend

### Completely Assembled

Shipped as a set which includes the Operation Unit, Lamp (lighted models only), and Switch.


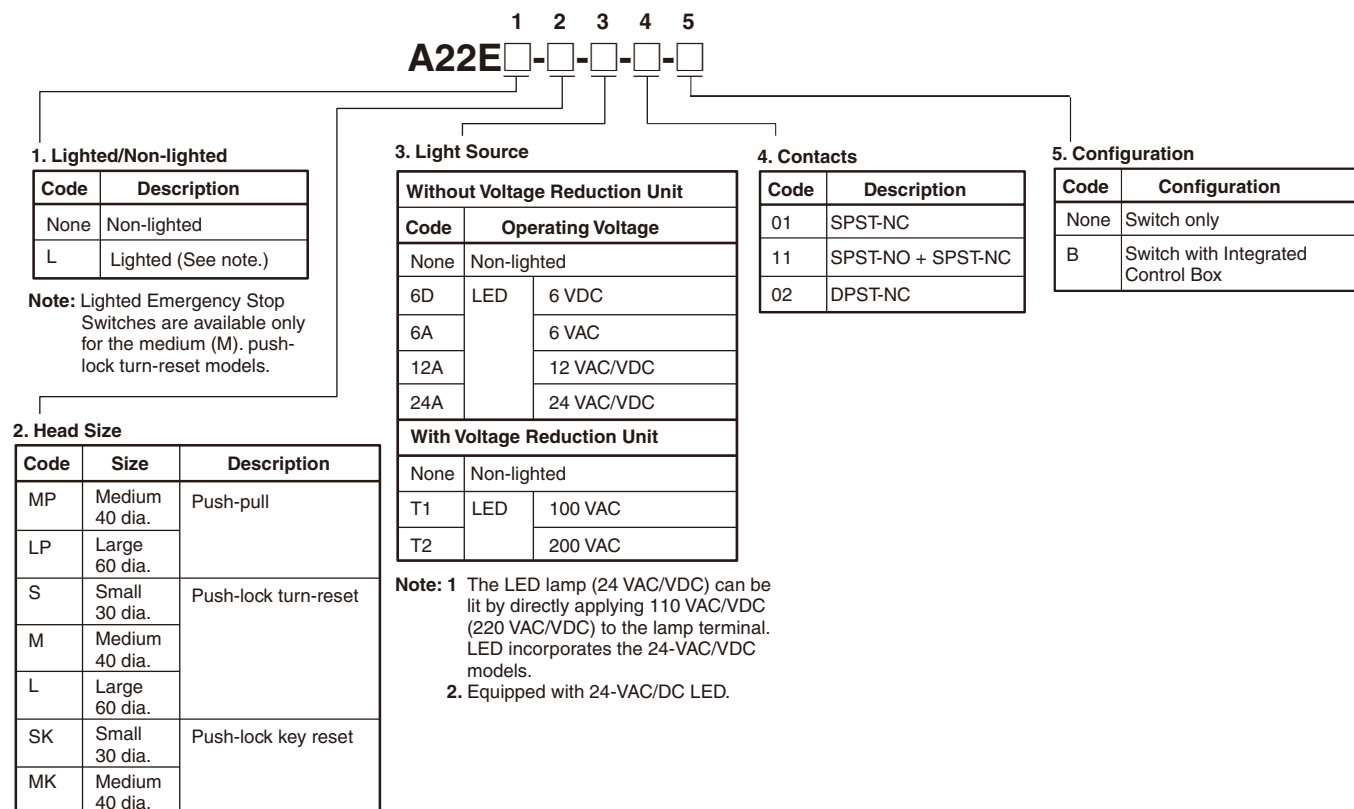


# Ordering Information


## ■ List of Models

### Completely Assembled

#### Non-lighted Models

| Appearance                                               |                                                                                     | Output            | Push-lock turn-reset system | Color of cap |
|----------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------|-----------------------------|--------------|
| 40-dia. head<br>Medium Push-pull<br>A22E-MP              |    | SPST-NC           | A22E-MP-01                  | Red          |
|                                                          |                                                                                     | SPST-NO/SPST-NC   | A22E-MP-11                  |              |
|                                                          |                                                                                     | DPST-NC           | A22E-MP-02                  |              |
| 60-dia. head<br>Large Push-pull<br>A22E-LP               |    | SPST-NC           | A22E-LP-01                  |              |
|                                                          |                                                                                     | SPST-NO/SPST-NC   | A22E-LP-11                  |              |
|                                                          |                                                                                     | DPST-NC           | A22E-LP-02                  |              |
| 30-dia. head<br>Small Push-lock<br>Turn-reset<br>A22E-S  |    | SPST-NC           | A22E-S-01                   |              |
|                                                          |                                                                                     | SPST-NO/SPST-NC   | A22E-S-11                   |              |
|                                                          |                                                                                     | DPST-NC           | A22E-S-02                   |              |
|                                                          |                                                                                     | DPST-NC + SPST-NO | A22E-S12                    |              |
|                                                          |                                                                                     | TPST-NC           | A22E-S-03                   |              |
| 40-dia. head<br>Medium Push-lock Turn-reset<br>A22E-M    |   | SPST-NC           | A22E-M-01                   |              |
|                                                          |                                                                                     | SPST-NO/SPST-NC   | A22E-M-11                   |              |
|                                                          |                                                                                     | DPST-NC           | A22E-M-02                   |              |
|                                                          |                                                                                     | DPST-NC + SPST-NO | A22E-M-12                   |              |
|                                                          |                                                                                     | TPST-NC           | A22E-M-03                   |              |
| 60-dia. head<br>Large Push-lock Turn-reset<br>A22E-L     |  | SPST-NC           | A22E-L-01                   |              |
|                                                          |                                                                                     | SPST-NO/SPST-NC   | A22E-L-11                   |              |
|                                                          |                                                                                     | DPST-NC           | A22E-L-02                   |              |
| 30-dia. head<br>Small Push-lock Key-reset<br>A22E-SK     |  | SPST-NC           | A22E-SK-01                  |              |
|                                                          |                                                                                     | SPST-NO/SPST-NC   | A22E-SK-11                  |              |
|                                                          |                                                                                     | DPST-NC           | A22E-SK-02                  |              |
| 40-dia. head<br>Medium Push-lock<br>Key-reset<br>A22E-MK |  | SPST-NC           | A22E-MK-01                  |              |
|                                                          |                                                                                     | SPST-NO/SPST-NC   | A22E-MK-11                  |              |
|                                                          |                                                                                     | DPST-NC           | A22E-MK-02                  |              |

## Lighted Models

| Appearance                                                                                                                                                          | Output          | Lighting | Rated voltage | Push-lock turn-reset system | Color of cap |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------|---------------|-----------------------------|--------------|
| 40-dia. head<br>Push-lock<br>Turn-reset without Voltage Reduction Unit<br>A22E<br> | SPST-NC         | LED      | 6 VDC         | A22EL-M-6D-01               | Red          |
|                                                                                                                                                                     |                 |          | 6 VAC         | A22EL-M-6A-01               |              |
|                                                                                                                                                                     |                 |          | 12 VAC/VDC    | A22EL-M-12A-01              |              |
|                                                                                                                                                                     |                 |          | 24 VAC/VDC    | A22EL-M-24A-01              |              |
|                                                                                                                                                                     | SPST-NO/SPST-NC |          | 6 VDC         | A22EL-M-6D-11               |              |
|                                                                                                                                                                     |                 |          | 6 VAC         | A22EL-M-6A-11               |              |
|                                                                                                                                                                     |                 |          | 12 VAC/VDC    | A22EL-M-12A-11              |              |
|                                                                                                                                                                     |                 |          | 24 VAC/VDC    | A22EL-M-24A-11              |              |
|                                                                                                                                                                     | DPST-NC         |          | 6 VDC         | A22EL-M-6D-02               |              |
|                                                                                                                                                                     |                 |          | 6 VAC         | A22EL-M-6A-02               |              |
|                                                                                                                                                                     |                 |          | 12 VAC/VDC    | A22EL-M-12A-02              |              |
|                                                                                                                                                                     |                 |          | 24 VAC/VDC    | A22EL-M-24A-02              |              |
| 40-dia. head<br>Push-lock<br>Turn-reset with Voltage Reduction Unit<br>A22E<br>    | SPST-NC         | 100 VAC  | A22EL-M-T1-01 |                             |              |
|                                                                                                                                                                     |                 | 200 VAC  | A22EL-M-T2-01 |                             |              |
|                                                                                                                                                                     | SPST-NO/SPST-NC | 100 VAC  | A22EL-M-T1-11 |                             |              |
|                                                                                                                                                                     |                 | 200 VAC  | A22EL-M-T2-11 |                             |              |
|                                                                                                                                                                     | DPST-NC         | 100 VAC  | A22EL-M-T1-02 |                             |              |
|                                                                                                                                                                     |                 | 200 VAC  | A22EL-M-T2-02 |                             |              |


## ■ Switch with Integrated Control Box

| Appearance                                                                          | Output          | Model      |
|-------------------------------------------------------------------------------------|-----------------|------------|
|  | SPST-NC         | A22E-M-01B |
|                                                                                     | SPST-NO/SPST-NC | A22E-M-11B |
|                                                                                     | DPST-NC         | A22E-M-02B |


# ■ Subassembled

The Operation Unit, Lamp, or Switch can be ordered separately. Use them in combination for models that are not available as assembled Units. These can also be used as inventory for maintenance parts.







● Non-lighted

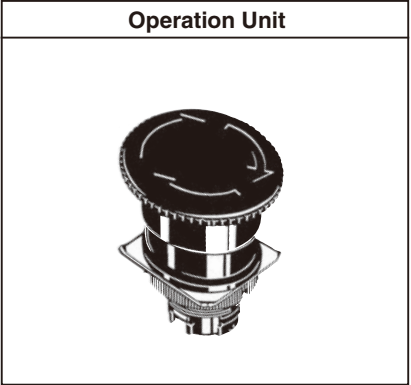

● Lighted (without Voltage Reduction Unit)

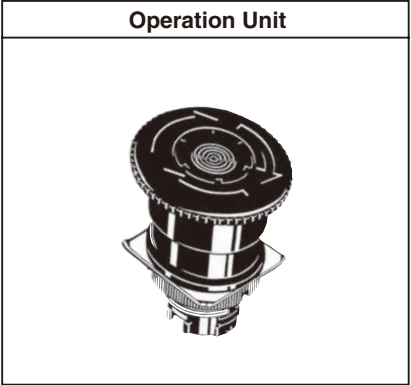


● Lighted (with Voltage Reduction Unit)

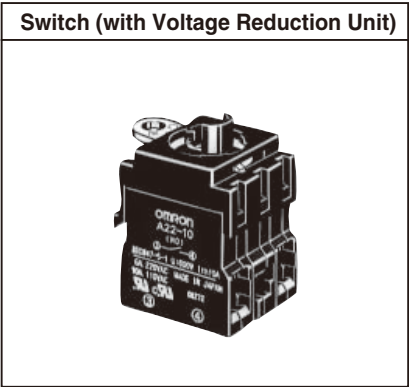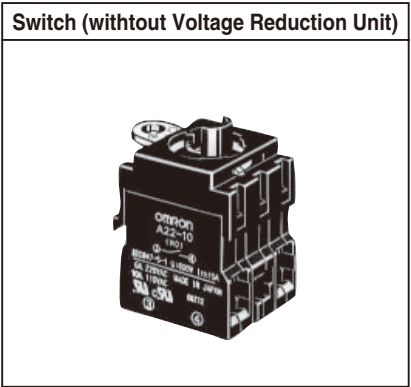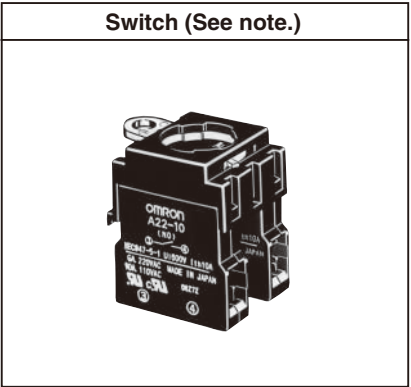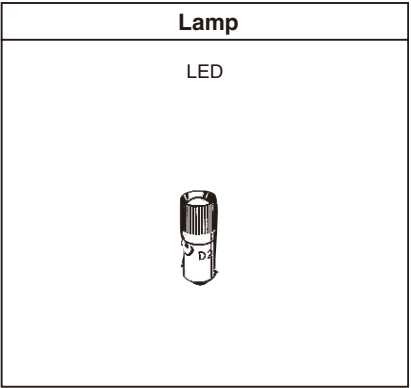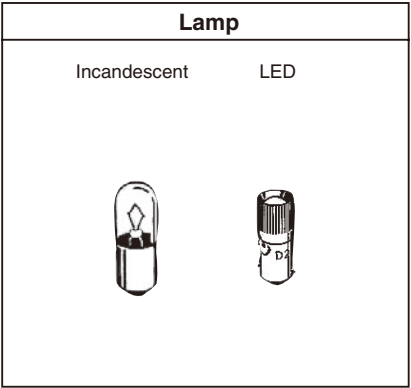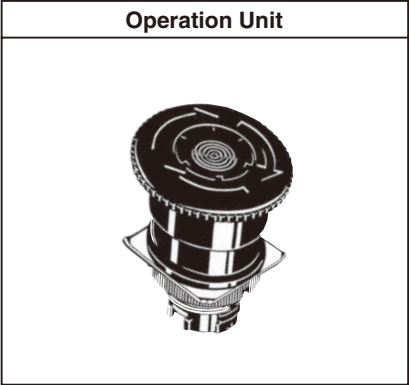

**Note:** Up to three Switch Units can be mounted for multiple contacts.

■ Operation Units

Non-lighted

| Sealing capability and size                     | IP65 oil-resistant models                                                                 |                                                                                            |                                                                                             |
|-------------------------------------------------|-------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
|                                                 | Small (30 dia.)                                                                           | Medium (40 dia.)                                                                           | Large (60 dia.)                                                                             |
| Push-pull                                       | ---                                                                                       | A22E-MP  | A22E-LP  |
| Push-lock, Turn-reset                           | A22E-S   | A22E-M   | A22E-L   |
| Push-lock, key-reset<br>(push-lock, turn-reset) | A22E-SK  | A22E-MK  | ---                                                                                         |

Lighted

| Sealing capability and size | IP65                                                                                       |
|-----------------------------|--------------------------------------------------------------------------------------------|
|                             | Medium (40 dia.)                                                                           |
| Push-lock, Turn-reset       | A22EL-M  |

## Lamp

### LED

| Appearance                                                                        | LED light |          | Rated voltage | Model     |
|-----------------------------------------------------------------------------------|-----------|----------|---------------|-----------|
|  | Red       | Standard | 6 VDC         | A22-6DR   |
|                                                                                   |           |          | 6 VAC         | A22-6AR   |
|                                                                                   |           |          | 12 VAC/VDC    | A22-12AR  |
|                                                                                   |           |          | 24 VAC/VDC    | A22-24AR  |
|                                                                                   | Bright    |          | 24 VAC/VDC    | A22-24ASR |

**Note:** For voltage-reduction lighting, use the A22-24AR.

### Incandescent


| Appearance                                                                        | Rated voltage | Model  |
|-----------------------------------------------------------------------------------|---------------|--------|
|  | 6 VDC         | A22-5  |
|                                                                                   | 14 VAC        | A22-12 |
|                                                                                   | 28 VAC        | A22-24 |
|                                                                                   | 130 VAC       | A22-H1 |

## Switch (Standard Load)

### Without Voltage Reduction Unit



| Classification<br>Appearance |                   | Non-lighted                                                                       | Lighted                                                                             |
|------------------------------|-------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                              |                   |  |  |
| Switch Action                |                   | Momentary                                                                         | Momentary                                                                           |
| Contacts                     |                   |                                                                                   |                                                                                     |
| For standard loads           | SPST-NO           | A22-10M                                                                           | A22L-10M                                                                            |
|                              | SPST-NC           | A22-01M                                                                           | A22L-01M                                                                            |
|                              | SPST-NO + SPST-NC | A22-11M                                                                           | A22L-11M                                                                            |
|                              | DPST-NO           | A22-20M                                                                           | A22L-20M                                                                            |
|                              | DPST-NC           | A22-02M                                                                           | A22L-02M                                                                            |


### With Voltage Reduction Unit

| Classification<br>Appearance |                   | Lighted (110 VAC)                                                                   | Lighted (220 VAC)                                                                     |
|------------------------------|-------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                              |                   |  |  |
| Switch Action                |                   | Momentary                                                                           | Momentary                                                                             |
| Contacts                     |                   |                                                                                     |                                                                                       |
| For standard loads           | SPST-NO           | A22L-10M-T1                                                                         | A22L-10M-T2                                                                           |
|                              | SPST-NC           | A22L-01M-T1                                                                         | A22L-01M-T2                                                                           |
|                              | SPST-NO + SPST-NC | A22L-11M-T1                                                                         | A22L-11M-T2                                                                           |
|                              | DPST-NO           | A22L-20M-T1                                                                         | A22L-20M-T2                                                                           |
|                              | DPST-NC           | A22L-02M-T1                                                                         | A22L-02M-T2                                                                           |

**Note:** 1. The above illustrations are for the DPST-NO contact.  
2. When using with a Voltage Reduction Unit, use the A22-24AR.

## Accessories (Order Separately)

| Item                             | Appearance                                                                          | Classification                              |              | Model       | Remarks                                                                                                                              |
|----------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------|--------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Switch Blocks                    |    | SPST-NO                                     |              | A22-10      | Provided as standard. Order Switch Blocks only when adding or replacing them.                                                        |
|                                  |                                                                                     | SPST-NC                                     |              | A22-01      |                                                                                                                                      |
|                                  |    | DPST-NO, one-piece                          |              | A22-20      |                                                                                                                                      |
|                                  |                                                                                     | DPST-NC, one-piece                          |              | A22-02      |                                                                                                                                      |
| Lamp Sockets                     |    | Direct lighting                             |              | A22-TN      | Used when changing the lighting method.                                                                                              |
|                                  |                                                                                     | Voltage-reduction lighting                  | 100 VAC      | A22-T1      |                                                                                                                                      |
|                                  |                                                                                     |                                             | 200 VAC      | A22-T2      |                                                                                                                                      |
| Mounting Latches                 |    | ---                                         |              | A22-3200    | Provided as standard. Order Mounting Latches only when mounting Switch Blocks or Lamp Sockets that are purchased individually.       |
| Legend Plates for Emergency Stop |    | 60-dia. black letters on yellow back-ground |              | A22Z-3466-1 | "EMERGENCY STOP" is indicated on the plate.                                                                                          |
|                                  |                                                                                     | 90-dia. black letters on yellow back-ground |              | A22Z-3476-1 |                                                                                                                                      |
|                                  |    | 60-dia. black letters on yellow back-ground |              | A22Z-3466-2 | "EMERGENCY OFF" is indicated on the plate.                                                                                           |
| Hole Plug                        |    | Round                                       |              | A22Z-3530   | Can be plugged into pre-cut panel holes for future expansion. The color is black.                                                    |
| Connectors                       |  | Applicable cable diameter (mm)              | 7 to 9 dia.  | A22Z-3500-1 | Plastic connector used to extend a cable from the Switch Box.                                                                        |
|                                  |                                                                                     |                                             | 9 to 11 dia. | A22Z-3500-2 |                                                                                                                                      |
| 25-dia. Ring                     |  | ---                                         |              | A22Z-R25    | Can be fit into a 25-dia. hole in the panel. Since this is not attached to the main body, order separately. (Refer to page 16.)      |
| 30-dia. Resin Attachment         |  | ---                                         |              | A22Z-A30    | Can be fit into a 30-dia. hole in the panel. (Refer to page 16.)                                                                     |
| Lock Plate                       |  | ---                                         |              | A22Z-3380   | Use to fix the lever on the Switch.                                                                                                  |
| Control Boxes (Enclosures)       |  | One hole, yellow box (for emergency stop)   |              | A22Z-B101Y  | Material: Polycarbonate resin                                                                                                        |
| Operation Keys                   |  | ---                                         |              | A22K-K      | Two keys are provided.                                                                                                               |
| Lock Ring                        |  | Rounded shape                               |              | A22Z-3360   | The body is equipped with a Lock Fitting. This Lock Fitting is used when a more secure lock feature is required. (Refer to page 16.) |
| Lamp Extractor                   |  | ---                                         |              | A22Z-3901   | Rubber tool used to replace Lamps easily                                                                                             |
| Tightening Tool                  |  | ---                                         |              | A22Z-3905   | Tool used to tighten nuts from the back of the panel and to attach caps to lighted models.                                           |

| Item          | Appearance                                                                        | Classification | Model    | Remarks                                                                                                                                                                               |
|---------------|-----------------------------------------------------------------------------------|----------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| E-stop Shroud |  | ---            | A22Z-EG1 | SEMI-S2/SEMATECH Application Guide for SEMI-S2-compatibility. The SEMI-S2-compatible Shroud and legend plate for EMERGENCY OFF come as a set. Use with an A22E Emergency Stop Switch. |
| E-stop Shroud |  | ---            | A22Z-EG2 | SEMI-S2/SEMATECH Application Guide for SEMI S2-compatible Shroud. Use together with an A22E Emergency Stop Switch.                                                                    |

## Specifications

### ■ Certified Standard Ratings

- UL, cUL (File No.E41515)  
6A at 220 VAC, 10 A at 110 VAC
- TÜV (EN60947-5-1) (Low Voltage Directive)  
3 A at 220VAC
- CCC (GB14048.5)  
3 A at 240 VAC, 1.5 A at 24 VDC

### ■ Certified Standards

| Certification body  | Standards                                                           | File No.         |
|---------------------|---------------------------------------------------------------------|------------------|
| UL (See note 2.)    | UL508                                                               | E41515           |
| TÜV Product Service | EN60947-5-1,<br>EN60947-5-5<br>(certified direct opening mechanism) | Inquire          |
| CQC (CCC)           | GB14048.5                                                           | 2003010303070635 |
| KOSHA (See note 3.) | EN60947-5-1                                                         | 2004-220         |

- Note:** 1. Only models with NC contacts have a direct opening mechanism.  
 2. UL-certification for CSA C22.2 No. 14 and bears the  mark.  
 3. Some models have been certified. Contact your OMRON sales representative.

### ■ Ratings

#### Contacts (Standard Load)

| Rated carry current | Rated voltage | Rated current (A)     |                       |                       |                       |
|---------------------|---------------|-----------------------|-----------------------|-----------------------|-----------------------|
|                     |               | AC15 (inductive load) | AC12 (resistive load) | DC13 (inductive load) | DC12 (resistive load) |
| 10 A                | 24 VAC        | 10                    | 10                    | ---                   | ---                   |
|                     | 110 VAC       | 5                     | 10                    |                       |                       |
|                     | 220 VAC       | 3                     | 6                     |                       |                       |
|                     | 380 VAC       | 2                     | 3                     |                       |                       |
|                     | 440 VAC       | 1                     | 2                     |                       |                       |
|                     | 24 VDC        | ---                   | ---                   | 1.5                   | 10                    |
|                     | 110 VDC       |                       |                       | 0.5                   | 2                     |
|                     | 220 VDC       |                       |                       | 0.2                   | 0.6                   |
|                     | 380 VDC       |                       |                       | 0.1                   | 0.2                   |

- Note:** 1. Rated current values are determined according to the testing conditions. The above ratings were obtained by conducting tests under the following conditions.  
 (1) Ambient temperature: 20°±2°C  
 (2) Ambient humidity: 65±5%  
 (3) Operating frequency: 20 operations/minute  
 2. Minimum applicable load: 10 mA at 5 VDC

#### LED Indicators without Voltage Reduction Unit

| Rated voltage | Rated current | Operating voltage |
|---------------|---------------|-------------------|
| 6 VDC         | 60 mA         | 6 VDC±5%          |
| 6 VAC         | 60 mA         | 6 VAC/VDC±5%      |
| 12 VAC/VDC    | 30 mA         | 12 VAC/VDC±5%     |
| 24 VAC/VDC    | 15 mA         | 24 VAC/VDC±5%     |

## ■ Characteristics

| Item                                        |                                    | Emergency Stop Switches                            |                      |
|---------------------------------------------|------------------------------------|----------------------------------------------------|----------------------|
|                                             |                                    | Non-lighted model: A22E                            | Lighted model: A22EL |
| Allowable operating frequency               | Mechanical                         | 30 operations/minute max. (See note 3.)            |                      |
|                                             | Electrical                         | 30 operations/minute max. (See note 3.)            |                      |
| Insulation resistance                       |                                    | 100 MΩ min. (at 500 VDC)                           |                      |
| Dielectric strength                         | Between terminals of same polarity | 2,500 VAC, 50/60 Hz for 1 min                      |                      |
|                                             | Between each terminal and ground   | 2,500 VAC, 50/60 Hz for 1 min                      |                      |
| Vibration resistance                        |                                    | 10 to 55 Hz, 1.5-mm double amplitude (See note 2.) |                      |
| Shock resistance                            | Destruction                        | 1,000 m/s <sup>2</sup>                             |                      |
|                                             | Malfunction (See note 2.)          | 250 m/s <sup>2</sup> max.                          |                      |
| Durability                                  | Mechanical                         | 300,000 operations min. (See note 3.)              |                      |
|                                             | Electrical                         | 300,000 operations min. (See note 3.)              |                      |
| Ambient operating temperature (See note 1.) |                                    | -20 to 70°C                                        | -20 to 55°C          |
| Ambient operating humidity                  |                                    | 35% to 85%                                         |                      |
| Ambient storage temperature                 |                                    | -40 to 70°C                                        |                      |
| Degree of protection                        |                                    | IP65 (oil-resistant) (See note 4.)                 | IP65 (See note 4.)   |
| Electric shock protection class             |                                    | Class II                                           |                      |
| PTI (tracking characteristic)               |                                    | 175                                                |                      |
| Degree of contamination                     |                                    | 3 (EN60947-5-1)                                    |                      |

**Note:** 1. With no icing or condensation.

2. Malfunction within 1 ms.

3. Setting and resetting once is counted as one operation.

4. The degree of protection from the front of the panel.


# Dimensions

**Note:** All units are in millimeters unless otherwise indicated.

## Non-lighted Models


### A22E-MP

Medium Push-pull (40-dia.)

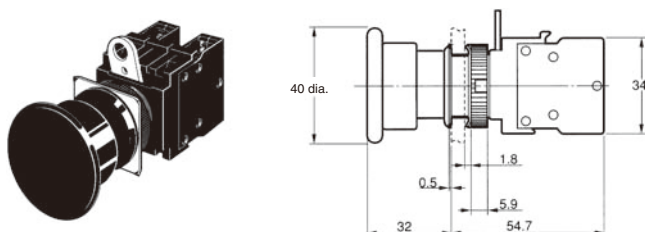


### A22E-LP

Large Push-pull (60-dia.)

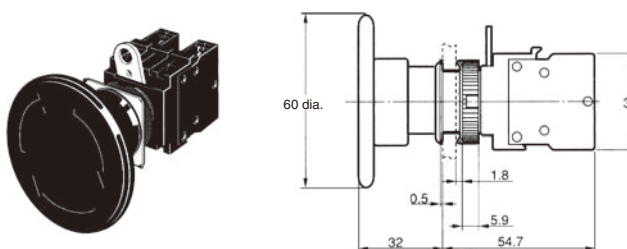


### A22E-S

Small Push-lock, Turn-reset (30-dia.)

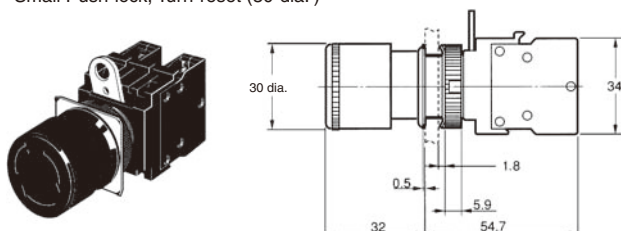


### A22E-M

Medium Push-lock, Turn-reset (40-dia.)

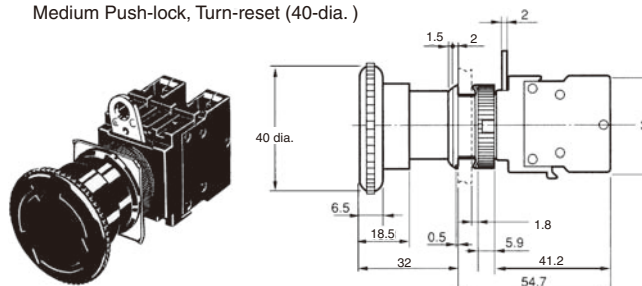


### A22E-L

Large Push-lock, Turn-reset (60-dia.)

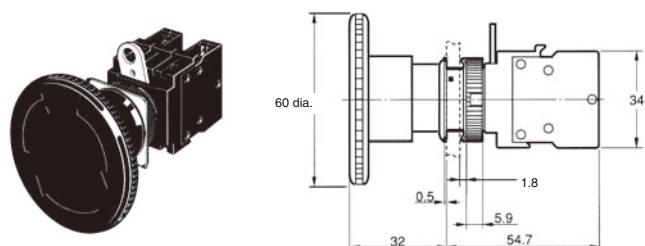


### A22E-SK

Small Push-lock, Key-reset (30-dia.)

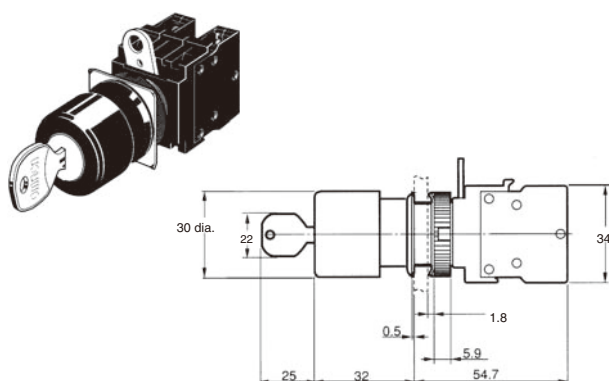

### A22E-MK


Medium Push-lock, Key-reset (40-dia.)

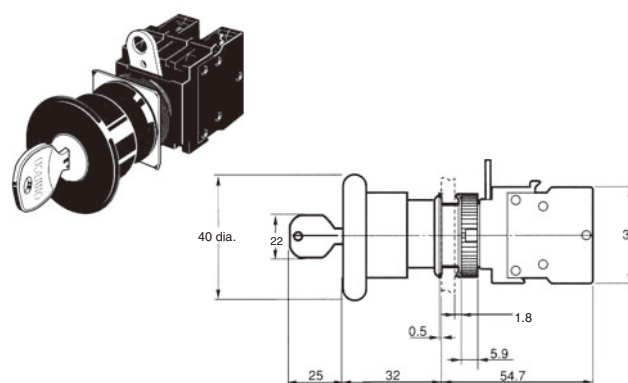


Lighted Models

A22EL-M

Medium Push-lock, Turn-reset (40-dia.)

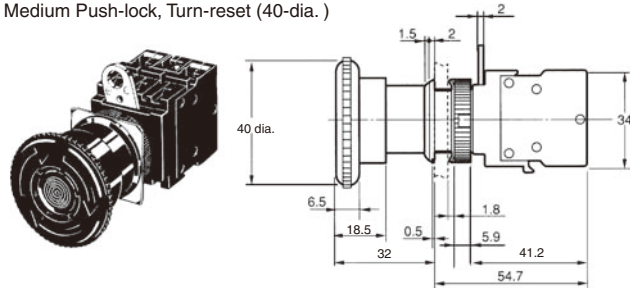

Switch dimensions when mounted to a DPST-NO (or DPST-NC) one-piece Switch Block

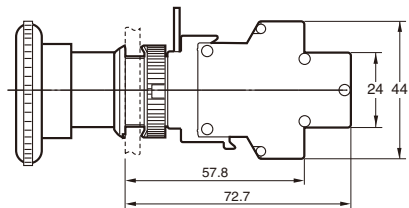


Note: The operation unit is an example for the A22E-M.

■ Dimensions for Accessories


Hole Plug

Round A22Z-3530

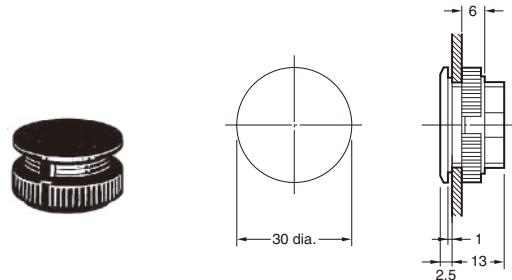


30-dia. Resin Attachment

A22Z-A30

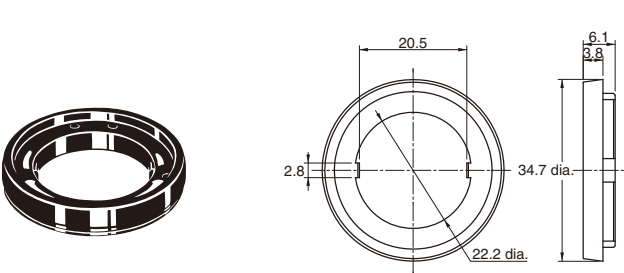

Lamp Extractor

A22Z-3901

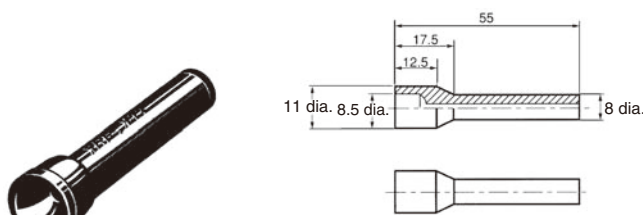

Material: Chloroprene rubber


Tightening Wrench

A22Z-3905




Legend Plates for Emergency Stop


A22Z-3476-1 (φ90)

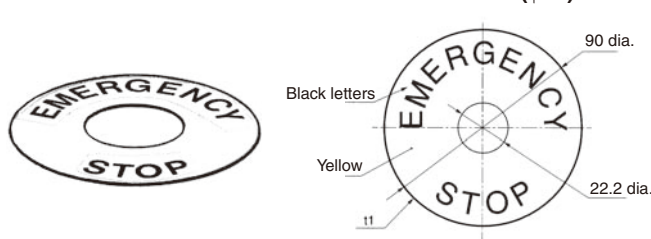

A22Z-3466-1 (φ60)




A22Z-3466-2 (φ60)



Lock Ring


A22Z-3360

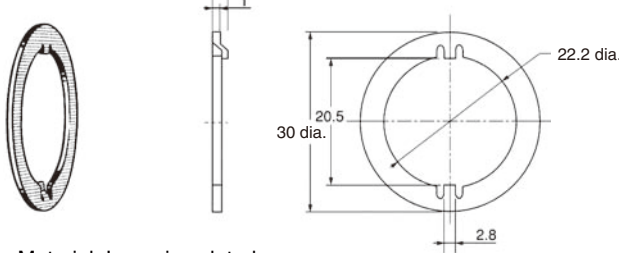

Material: Iron, zinc plated

25-dia. Ring


A22Z-R25

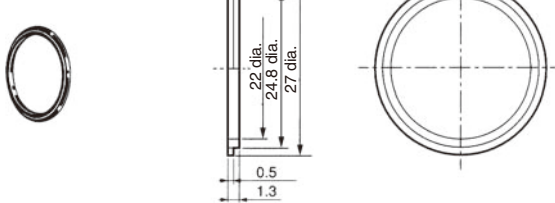


Material: NBR (black)

## Lamp

LED A22-6□, 12□, 24□


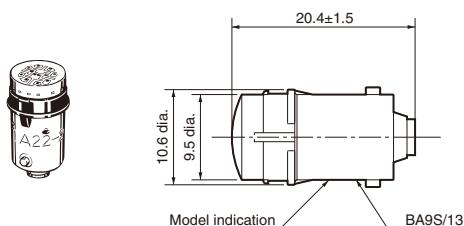


Incandescent Lamp A22-5, 12, 24, H1

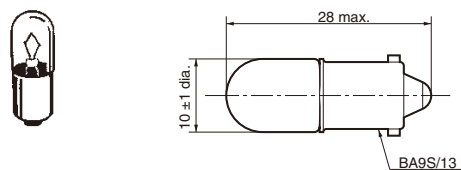


## Control Box

A22Z-B101Y (1 hole)

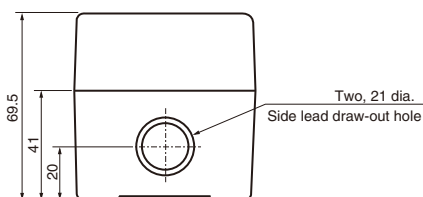
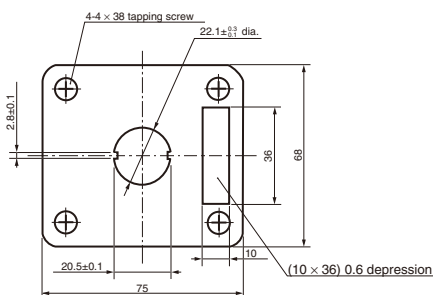


Cable Draw-out Hole (Top View)

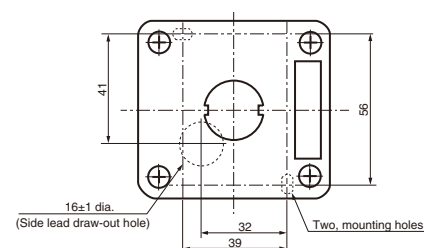


## E-stop Shroud


A22Z-EG1

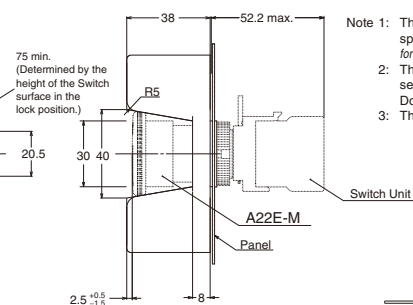


- Note 1: The dimensions of the Shroud conform to the specifications of the SEMATECH Application Guide for SEMI S2-93.
- Note 2: These Shrouds are designed for use only in semiconductor manufacturing equipment. Do not use them for any other application.
- Note 3: The Shroud is not provided with the Switch.





Panel Cutout Dimensions





Allowable panel thickness: 1 to 3 mm



E-stop Shroud  
A22Z-EG2, A22Z-EG21, A22Z-EG22

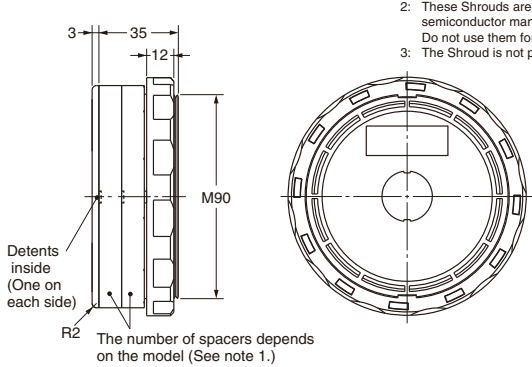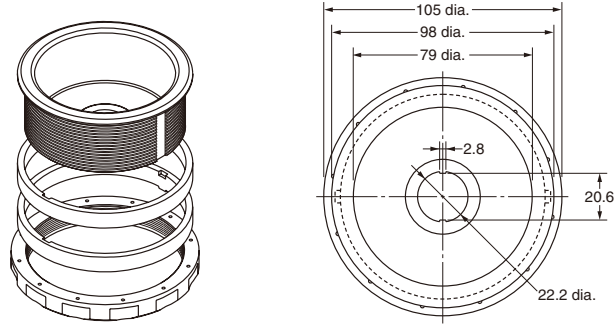

- Note 1: The dimensions of the Shroud conform to the specifications of the SEMATECH Application Guide for SEMI S2-93.  
2: These Shrouds are designed for use only in semiconductor manufacturing equipment. Do not use them for any other application.  
3: The Shroud is not provided with the Switch.

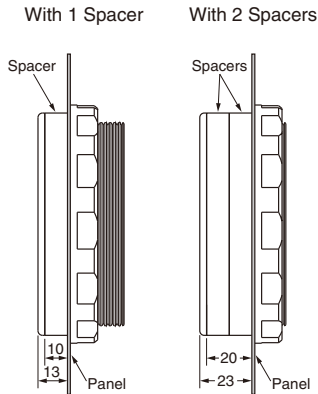


**Note:** 1. The number of Spacers that are combined depends on the model.


| Model     | No. of Spacers |
|-----------|----------------|
| A22Z-EG2  | 0              |
| A22Z-EG21 | 1              |
| A22Z-EG22 | 2              |

2. Tighten to a torque of 1.96 to 2.94 N·m.

Mounting a 1-pole Switch Unit  
(See note 4.)

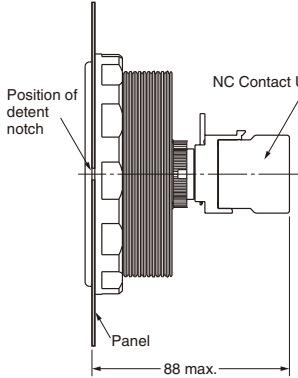


Mounting a 2-pole Switch Unit  
(See note 4.)

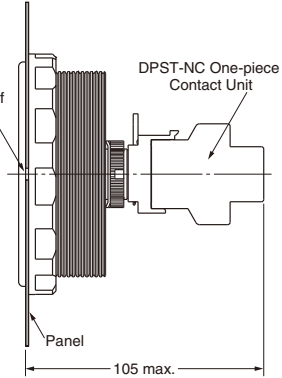

3. The allowable panel thicknesses are as follows:  
Without Spacers:  $t=1.3$  to  $22.5$  mm  
With 1 Spacer:  $t=1.3$  to  $12.5$  mm  
With 2 Spacers:  $t=1.3$  to  $2.5$  mm  
4. These are the dimension from the front of the panel when the Switch Unit is attached.


■ Panel Cutouts

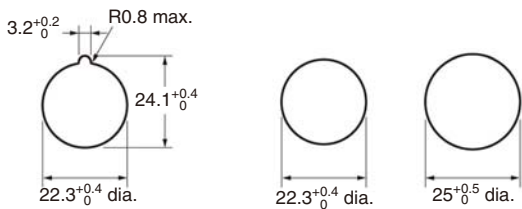

- With Lock Fitting**      **Without Lock Fitting**  
A Lock Ring is provided as a standard feature.  
**Note:** 1. When painting or coating the panel, make sure that the specified panel dimensions apply to the panel after painting or coating.  
2. Use an A22Z-R25 Ring when mounting to a panel with a 25-mm diameter hole.

# Terminal Arrangement

## Terminal Arrangement (Bottom View)

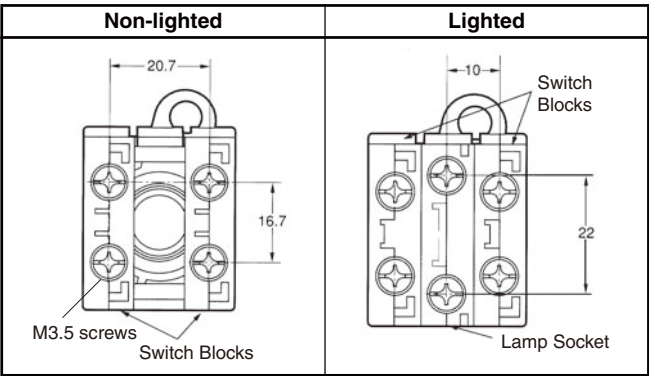

## Terminal Connection

| Type                                   | Terminal connection (BOTTOM VIEW) |         |
|----------------------------------------|-----------------------------------|---------|
|                                        | SPST-NO + SPST-NC                 | DPST-NC |
| Non-lighted                            |                                   |         |
| Lighted without Voltage Reduction Unit |                                   |         |
| Lighted with Voltage Reduction Unit    |                                   |         |


**Note:** The above terminal connection diagrams are examples for SPST-NO + SPST-NC and DPST-NC.

# Installation

## Mounting to the Panel

### (1) Preparing the Panel

- The panel dimensions are shown below.
- The panel thickness must be 1 to 5 mm.

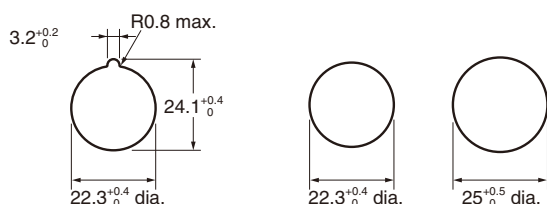


With Lock Ring

Without Lock Ring


- Always use a 25-mm-dia. Lock Ring for a 25-mm-dia. hole. IP65 degree of protection will be lost if the 25-mm-dia. Lock Ring is not used because of the larger size of a 25-mm-dia. hole.
- When painting or coating the panel, make sure that the specified panel dimensions apply to the panel after painting or coating.

### (3) Mounting the Operation Unit on the Panel

- Insert the Operation Unit from the front surface of the panel, insert the Lock Ring and the mounting nut from the terminal side, then tighten the nut. Before tightening, check that the rubber washer is present between the Operation Unit and the panel.
- When using a Legend Plate Frame, put one rubber washer each between the Legend Plate Frame and the panel and between the Operation Unit and the Legend Plate Frame. (One rubber washer will be provided when one Legend Plate Frame is ordered.)
- Align the Lock Ring with the groove in the casing, then insert the Lock Ring so that its edge is located on the panel side.
- Tighten the mounting nut at a torque of 0.98 to 1.96 N·m.
- When using a Lock Ring, replace with the supplied Lock Ring, insert the projecting part into the lock slot, and then tighten the mounting nut.

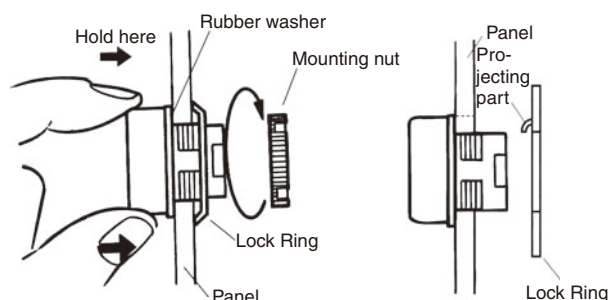


- When the panel cutout dimension is 25 dia., remove the supplied rubber washer and mount the 25-dia. Ring as shown below. (Since the A22Z-R25 is not attached to the main body, order separately.)
- When the panel cutout dimension is 25 dia., remove the supplied rubber washer and mount the 25-dia. Ring as shown below. (Since the A22Z-R25 is not attached to the main body, order separately.)

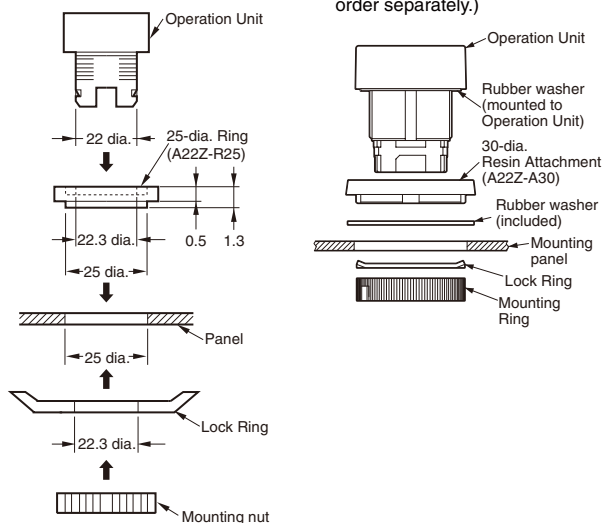


### (2) Matrix Mounting

- The following diagram provides the dimensions for mounting individual Switches, Legend Plates, and Lock Rings with leads connected directly to Switch terminals.



- The following diagram provides the dimensions for mounting Large Legend Plates with crimp terminals connected to Switch terminals.



Dimensions A and B between mounting hole centers are given in the following tables.

For 1., Above

| Switch model                                      | Dimension A |
|---------------------------------------------------|-------------|
| A22-10, A22-10S, A22-01, A22-01S                  | 45 mm min.  |
| A22-20, A22-20S, A22-02, A22-02S, A22-11, A22-11S | 55 mm min.  |


For 2., Above

| Type of crimp terminal                  | Switch model                                      | Dimension B |
|-----------------------------------------|---------------------------------------------------|-------------|
| Naked crimp terminals                   | A22-10, A22-10S, A22-01, A22-01S                  | 51 mm min.  |
|                                         | A22-20, A22-20S, A22-02, A22-02S, A22-11, A22-11S | 61 mm min.  |
|                                         | A22-10, A22-10S, A22-01, A22-01S                  | 60 mm min.  |
| Crimp terminals with insulating sheaths | A22-20, A22-20S, A22-02, A22-02S, A22-11, A22-11S | 70 mm min.  |

- Note:** 1. The above dimensions are the minimum dimensions when using the applicable wiring materials listed on page 19. If any other materials are used, check the suitability of dimensions in advance.
2. When using pushbuttons exceeding 30 mm, adjust dimension A or B accordingly. (When mounting the A22-M□ in a matrix, "30 mm" would have to be increased to 40 mm.)


### (4) Mounting the Switch on the Operation Unit

- Insert the Operation Unit into the Switch Unit, aligning the arrow mark inscribed on the Case with the lever on the Switch Blocks, then move the lever in the direction indicated by the arrow in the following figure.

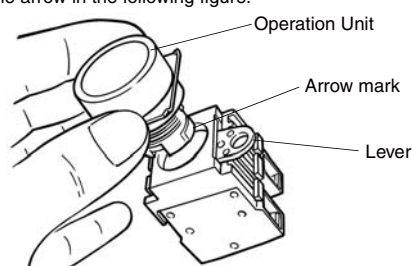


### (5) Removing the Switch



- Move the lever in the direction indicated by the arrow in the following figure, then pull the Operation Unit or the Switch Blocks. Since the lever has a hole with an inside diameter of 6.5 mm, the lever can be moved in the specified direction by inserting a screwdriver into the hole and then moving the screwdriver.

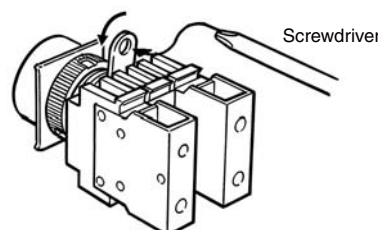

# Assembling the Cap
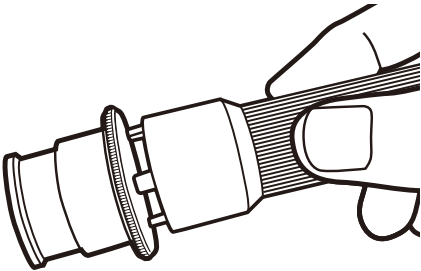
| Emergency Stop Switch                                                                                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>Insert the protrusion of the Tightening Wrench (A22Z-3905) into the Cap slot and then turn to remove the Cap.</li></ul> |
|                                                                              |


# Installing/Replacing the Lamp
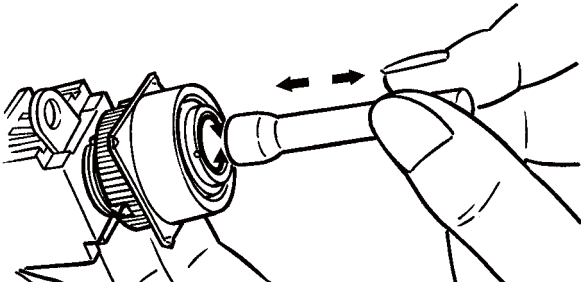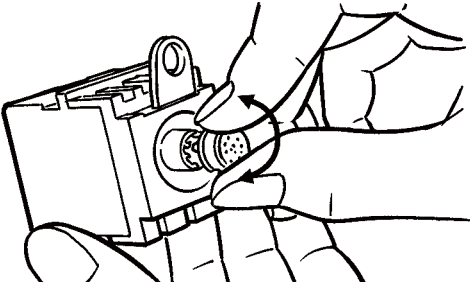
| (1) Installing/Replacing from the Panel Surface                                                                                                   | (2) Installing/Replacing on the Switch                                                                                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>Insert the Lamp Extractor (A22Z-3901) into the lamp, then rotate the Extractor while pressing it.</li></ul> | <ul style="list-style-type: none"><li>Grip the indicator with your fingers, then rotate the indicator while pressing it against the Switch.</li></ul> |
|                                                                  |                                                                     |

Control Box (Enclosure)


(1) Mounting the Switch

The Standard-size Legend Plate Frame can be mounted. Mount the Frame as shown in the following diagram. Mount the Switch in the same way as for an ordinary panel.



(2) Creating a Cable Port Hole

Place the tip of a screwdriver on the surface where the cable port hole is to be created with the cover attached and strike the screwdriver to punch a hole. Attempts to punch a hole on the other side of the case will damage the Box.




(3) Securing the Connector Cable

1. Insert the connector into the cable port hole in the Box and secure with the fixing nut inside the box.

2. Open a hole in the thin rubber section of the rubber ring.

3. Pass the tightening cap through the cable, insert the cable into the connector, and tighten the hexagonal nut to secure the cable.

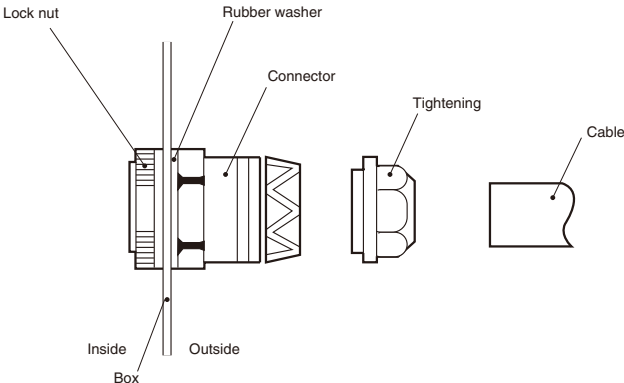


| Cable diameter | Connector   |
|----------------|-------------|
| 7 to 9 dia.    | A22Z-3500-1 |
| 9 to 11 dia.   | A22Z-3500-2 |

Installing/Removing the Switch Blocks

(1) Installing the Switch Blocks

• Hook the small protrusion on the Mounting Latch into the groove on the other side of the lever, then push up the Switch Block in the direction indicated by the arrow in the figure below.

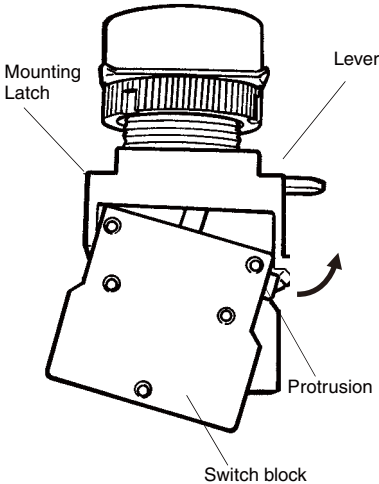

(2) Removing the Switch Blocks


• Insert a screwdriver between the Mounting Latch and the Switch Block, then push down the screwdriver in the direction indicated by the arrow in the following figure.


Use either of the following screwdrivers.

Flat-head screwdriver 3 to 6 mm




Phillips screwdriver 3 to 6 mm dia.



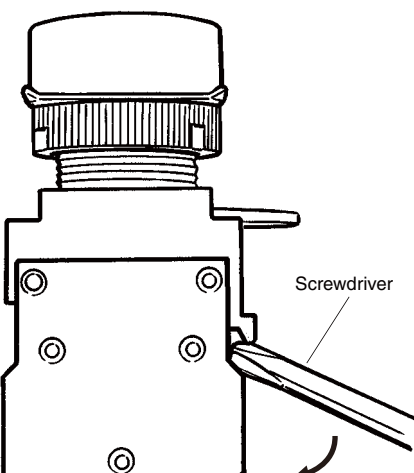

Wiring

• Loosen the terminal screw from the Switch Unit until it completely comes off the groove, insert a screwdriver as shown in the following figure, then push up the washer in the direction indicated by the arrow to temporarily secure it. Now, a round crimp terminal can be connected. After inserting the terminal, tighten the screws to complete wiring.

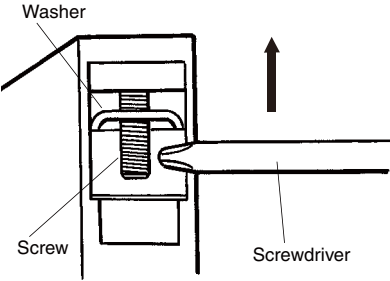

OMRON <http://www.ia.omron.com/>

(c)Copyright OMRON Corporation 2007 All Rights Reserved.

18

# Safety Precautions

Be sure to read the precautions for all pushbutton switches in the *Pushbutton Switches Group Catalog* (Cat. No. X018).

## CAUTION

Do not apply a voltage exceeding the rated voltage across the incandescent lamp terminals.  
The lamp may be destroyed and the operation unit may fly out.



## ■ Precautions for Correct Use


### Mounting

- Always make sure that the power is turned OFF before wiring the Switch. Also, do not touch the terminals or other current-carrying parts while power is being supplied. Electric shock may occur.
- Do not tighten the mounting ring more than necessary using tools such as pointed-nose pliers. Doing so will damage the mounting ring. The tightening torque is 0.98 to 1.96 N·m.
- Recommended panel thickness: 1 to 5 mm.


### Wiring

- When DC-specific LEDs are used, wire the Switch so that the X1 terminal is positive.
- Terminal screws must be Phillips or slotted M3.5 screws with a square washer.
- The tightening torque is 1.08 to 1.27 N·m.
- Single wires, stranded wires, and crimp terminals can be connected to the Switch.
- Applicable Wiring Materials:  
Twisted strands: 2 mm<sup>2</sup> max.  
Solid wire: 1.6 mm dia.

Naked Crimp Terminals



Crimp Terminals with Insulating Sheaths



- After wiring the Switch, maintain an appropriate clearance and creepage distance.

## Operating Environment


- The IP65 model is designed with a protective structure so that it will not sustain damage if it is subjected to water from any direction to the front of the panel.

## LEDs

- The LED current-limiting resistor is built-in, so internal resistance is not required.
- If commercially available LEDs are used, select the ones that meet the following conditions:  
Base: BA9S/13□  
Overall length: 26 mm max.  
Power consumption: 2.6 W max.




## Using the Microload

- Contact failure may occur if a Switch designed for a standard load is used to switch a microload. Use Switches within the application ranges shown in the following graph. Even within the application range, insert a contact protection circuit, if necessary, to prevent the reduction of life expectancy due to extreme wear on the contacts caused by loads where inrush current occurs when the contact is opened and closed.  
The minimum applicable load is the N-level reference value. This value indicates the malfunction reference level for the reliability level of 60% ( $\lambda$  60) (conforming to JIS C5003).  
The equation,  $\lambda$  60 =  $0.5 \times 10^{-6}/\text{time}$  indicates that the estimated malfunction rate is less than 1/2,000,000 with a reliability level of 60%.



## Others

- If the panel is to be coated, make sure that the panel meets the specified dimensions after coating.
- Due to the structure of the Switch, severe shock or vibration may cause malfunctions or damage to the Switch. Also, most Switches are made from resin and will be damaged if they come into contact with sharp objects. Particularly scratches on the Operation Unit may create visual and operational obstructions. Handle the Switches with care, and do not throw or drop them.

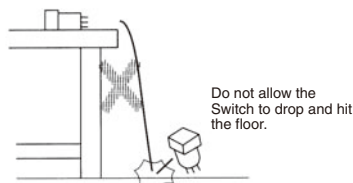

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. A119-E1-06

In the interest of product improvement, specifications are subject to change without notice.



## WARNING

This catalog is a guide to help customers select the proper safety products. Observe the following items when choosing products, select the right products for your devices or equipment, and develop a safety-related system to fully utilize product functions.

### Setting Up a Risk Assessment System

The items listed in this catalog must be used properly in terms of product location as well as product performance and functionality. Part of the process of selecting and using these products should include the introduction and development of a risk assessment system early in the design development stage to help identify potential dangers in your equipment that will optimize safety product selection. A badly designed risk assessment system often results in poor choices when it comes to safety products.

- Related International Standards:  
ISO 14121 Principles of Risk Assessment

### Safety Policy

When developing a safety system for the devices and equipment that use safety products, make every effort to understand and conform to the entire series of international and industrial standards available, such as the examples given below.

- Related International Standards:  
ISO 12100 Basic Concepts, General Principles for Design  
IEC 61508 Functional Safety of Electrical/Electronic/Programmable Electronic Safety-related Systems

### Role of Safety Products

Safety products have functions and mechanisms that ensure safety as defined by standards. These functions and mechanisms are designed to attain their full potential within safety-related systems. Make sure you fully understand all functions and mechanisms, and use that understanding to develop systems that will ensure optimal usage.

- Related International Standards:  
ISO 14119 Interlocking Devices Associated with Guards-Principles for Design and Selection

### Installing Safety Products

Make sure that properly educated and trained engineers are selected to develop your safety-related system and to install safety products in devices and equipment.

- Related International Standards:  
ISO 12100 Basic Concepts, General Principles for Design  
IEC 61508 Functional Safety of Electrical/Electronic/Programmable Electronic Safety-related Systems

### Observing Laws and Regulations

Safety products should conform to pertinent laws, regulations, and standards, but make sure that they are used in accordance with the laws, regulations, and standards of the country where the devices and equipment incorporating these products are distributed.

- Related International Standards:  
IEC 60204 Electrical Equipment of Machines

### Observing Usage Precautions

Carefully read the specifications and precautions listed in this catalog for your product as well as all items in the Operating Manual packed with the product to learn usage procedures that will optimize your choice. Any deviation from precautions will lead to unexpected device or equipment failure not anticipated by safety-related systems or fire originating from equipment failure.

### Transferring Devices and Equipment

When transferring devices and equipment, be sure to keep one copy of the Operating Manual and pack another copy with the device or equipment so the person receiving it will have no problem operating it.

- Related International Standards:  
ISO 12100 Basic Concepts, General Principles for Design  
IEC 61508 Functional Safety of Electrical/Electronic/Programmable Electronic Safety-related Systems

## Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

## Warranty and Limitations of Liability

### WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

### LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS, OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

## Application Considerations

### SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

## Disclaimers

### CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased product.

### DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

### ERRORS AND OMISSIONS

The information in this catalog has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

### PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

### PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

### COPYRIGHT AND COPY PERMISSION

This catalog shall not be copied for sales or promotions without permission.

This catalog is protected by copyright and is intended solely for use in conjunction with the product. Please notify us before copying or reproducing this catalog in any manner, for any other purpose. If copying or transmitting this catalog to another, please copy or transmit it in its entirety.