



Laboratory Power Supply Products from Aim-TTi

[▶ Go to main Aim-TTi international site](#) | [▶ Go to main Aim-TTi USA site](#)

The CPX400D & DP - Dual 420 watt PowerFlex DC PSUs (840W Total)

[▶ All Models Home](#)



[Click for larger Image](#)



CPX400D & DP

High power and dual outputs

The CPX400D and CPX400DP are the highest power variants of the CPX series.

PowerFlex regulation enables the 840 watts of total power to be configured to suit each specific application.

The two 420 watt outputs can each supply up to 60 volts or up to 20 amps. See below for power curve.

Isolated tracking enables the outputs to be wired in series or parallel whilst controlled from a single voltage adjustment for up to 120 volts or 40 amps.

The CPX400DP includes rear terminals and USB, RS232, GPIB and LXI compliant LAN interfaces.

[Learn More ▶▶](#)

▶ Take a Tour of the Features

"It's a power supply - what more do I need to know?"

The CPX Series includes some new and unique features that are well worth taking a look at.

▶ View or Download the Brochure


Use this link to download the colour brochure with includes full technical specifications.

▶ What's changed for CPX400A users?

Use this link to see the differences between the CPX400D and the previous model, the CPX400A.

▶ New Single Output Models

Single output versions, CPX400S, CPX400SA and CPX400SP are also available.

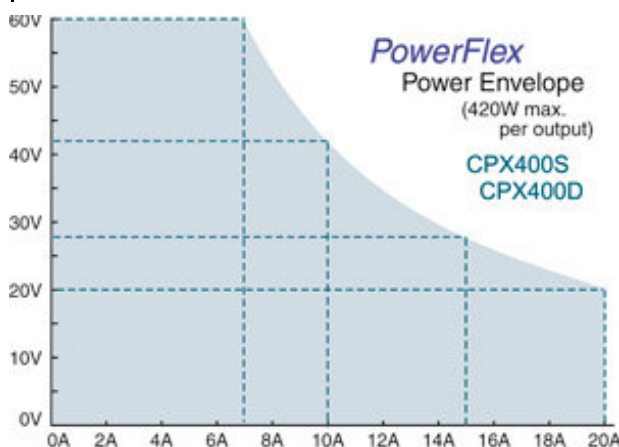

Aim-TTi - Thurlby Thandar Instruments Limited
 Glebe Road, Huntingdon, Cambridgeshire PE29 7DR United Kingdom
Tel: +44 1480 412451 **Fax: +44 1480 450409** **Web: www.aimtti.com** **Email: info@aimtti.com**