


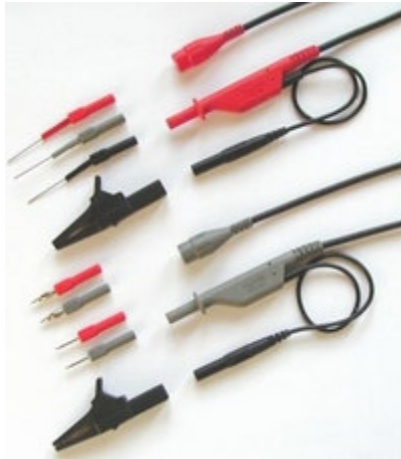

Industrial shielded, 1:1, silicone insulated test lead set. Useful bandwidth 1 MHz. Silicone insulated leads won't crack from cold or melt from accidental contact with hot surfaces. Superior strain relief and flexibility provide extra long life. Compatible with Fluke ScopeMeter Test Tools

Model Name	Description
Fluke STL90	Fluke STL90 Shielded Test Lead Set Shielded Test Lead Set Shielded test lead set contains: - Two shielded test leads: - Cable length: 1.5 m - Safety designed shrouded banana input - Safety designed insulated BNC connector - Maximum signal voltage: 300 V - Maximum voltage to ground: 600 V per IEC 1010-2-031 CAT III - Maximum current 3 A - Two Ground leads: - Cable length: 250 mm - Maximum current 3 A - Safety designed shrouded banana jacks - Two 4 mm Tip adapters, 30 V - Two 2 mm Tip adapters, 30 V - Three backprobe pins, 30 V, 1 A - Two insulated Alligator Clips (AC85A) - One year warranty