


5 x 20mm F Cartridge Fuse, 0.2A, 250 V

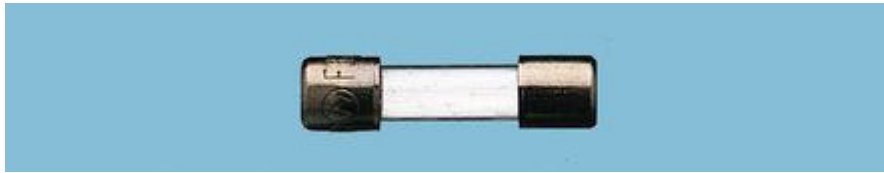

產品詳細資訊

193 Series Fuses

Fast-acting fuses, size 5 x 20 mm.

Glass body, nickel-plated brass ends.

RS, Professionally Approved Products, gives you professional quality parts across all product

categories. Our range has been testified by engineers as giving comparable quality to that of the

leading brands without paying a premium price.

Operating voltage:	250 Vac max.
Breaking capacity:	35 A / 250 Vac (except 4 A, 5 A and 6.3 A) - 4 A: 40 A / 250 Vac - 5 A: 50 A / 250 Vac - 6.3 A: 63 A / 250 Vac

Standards

UL; VDE; SEMKO; BEAB; DIN 4166; IEC 127-2/II and EN 60127-2/II

5 x 20 mm Rapid

Specification

Body Material	Glass
Breaking Capacity at Maximum Voltage Rating	35 A
Current Rating	0.2A
Diameter	5mm
Fuse Speed	F
Height	20mm
Maximum Operating Temperature	+70 °C
Minimum Operating Temperature	-25 °C
Operating Temperature Range	-25 → +70 °C
Overall Dimensions	5 x 20mm
Overall Length	20mm
Voltage Rating	250 V